

# MCQ JavaScript

## SET-12

By

**BHARAT BHUSHAN @ B. K. NAL**

Assistant Professor (Computer Science)  
Director, BSTI, Kokar

&

**SUPRIYA BHARATI**

Assistant Professor (Computer Science)  
Asst. Director, BSTI, Kokar



**Buddha Science & Technical Institute**

Kokar, Ranchi-834001, Jharkhand, India

[www.bharatsir.com](http://www.bharatsir.com)

1. When a JavaScript object is sent to Java, the runtime engine creates a Java wrapper of type \_\_\_\_\_
  - A. ScriptObject
  - B. JSObject
  - C. JavaObject
  - D. Jobject
2. \_\_\_\_\_ is a wrapped Java array, accessed from within JavaScript code.
  - A. JavaArray
  - B. JavaClass
  - C. JavaObject
  - D. JavaPackage
3. A \_\_\_\_\_ object is a reference to one of the classes in a Java package, such as `netscape.javascript` .
  - A. JavaArray
  - B. JavaClass
  - C. JavaObject
  - D. JavaPackage
4. The JavaScript exception is available to the Java code as an instance of \_\_\_\_\_
  - A. `netscape.javascript.JSObject`
  - B. `netscape.javascript.JSException`
  - C. `netscape.plugin.JSException`
  - D. None of the above
5. To automatically open the console when a JavaScript error occurs which of the following is added to `prefs.js`?

- A. `user_pref("javascript.console.open_on_error", false);`
- B. `user_pref("javascript.console.open_error ", true);`
- C. `user_pref("javascript.console.open_error ", false);`
- D. `user_pref("javascript.console.open_on_error", true);`

6. To open a dialog box each time an error occurs, which of the following is added to `prefs.js`?

- A. `user_pref("javascript.classic.error_alerts", true);`
- B. `user_pref("javascript.classic.error_alerts ", false);`
- C. `user_pref("javascript.console.open_on_error ", true);`
- D. `user_pref("javascript.console.open_on_error ", false);`

7. The syntax of a blur method in a button object is \_\_\_\_\_

- A. `Blur()`
- B. `Blur(contrast)`
- C. `Blur(value)`
- D. `Blur(depth)`

8. The syntax of capture events method for document object is \_\_\_\_\_

- A. `captureEvents()`
- B. `captureEvents(argseventType)`
- C. `captureEvents(eventType)`
- D. `captureEvents(eventVal)`

9. The syntax of close method for document object is

- A. Close(doC.
- B. Close(object)
- C. Close(val)
- D. Close()

10. `<script type="text/javascript"> x=4+"4"; document.write(x); </script>` output-----?

- A. 44
- B. 8
- C. 4
- D. Error output

11. Which best explains `getSelection()`?

- A. Returns the VALUE of a selected OPTION.
- B. Returns document.URL of the window in focus.
- C. Returns the value of cursor-selected text
- D. Returns the VALUE of a checked radio input.

12. What is mean by "this" keyword in javascript?

- A. It refers current object
- B. It referes previous object
- C. It is variable which contains value
- D. None of the above

13. `<script language="javascript"> function x() { document.write(2+5+"8"); } </script>`

- A. 258
- B. Error
- C. 7
- D. 78


14. `<script type="text/javascript"> var s = "9123456 or 80000?"; var pattern = /d{4}/; var output = s.match(pattern); document.write(output); </script>`
- A. 9123
  - B. 91234
  - C. 80000
  - D. None of the above
15. \_\_\_\_\_ tag is an extension to HTML that can enclose any number of java script.
- A. `< script>`
  - B. `<html>`
  - C. `<close>`
  - D. `<java>`
16. How do you call a function named "myFunction"?
- A. `myFunction()`
  - B. `call myFunction()`
  - C. `call function`
  - D. `myFunction()`
17. How to write an if statement in javascript?
- A. `if i = 5 then`
  - B. `if (i = = 5)`
  - C. `if l = = 5 then`
  - D. `if l = 5`
18. How can you detect the client's browser name?
- A. `navigator.appName`
  - B. `browser.name`
  - C. `client.navName`
  - D. `browser.name`

19. Which operator is used to assign a value to a variable?
- A. X
  - B. -
  - C. \*
  - D. =
20. What will the following code return: Boolean (10 > 9)
- A. False
  - B. NaN
  - C. True
  - D. None of these
21. JavaScript is \_\_\_\_\_ Side Scripting language.
- A. Browser
  - B. ISP
  - C. Server
  - D. None of these
22. Cost for Using javascript in your HTML is \_\_\_\_\_.
- A. its Free !!!
  - B. \$ 10/ Year
  - C. \$5/Year
  - D. \$ 15/Year
23. External javascript files should have \_\_\_\_\_ as file name extension.
- A. asp
  - B. .html
  - C. .php
  - D. .js
24. Why JavaScript is called as Lightweight Programming language?

- A. Because js is client side scripting
- B. Because Js is available free of cost
- C. Because we can add programming functionality inside Js
- D. Because js can provide programming functionally inside but up to certain extend.

25. Local Browser used for validations on the web pages uses \_\_\_\_\_.

- A. html
- B. css
- C. js
- D. java

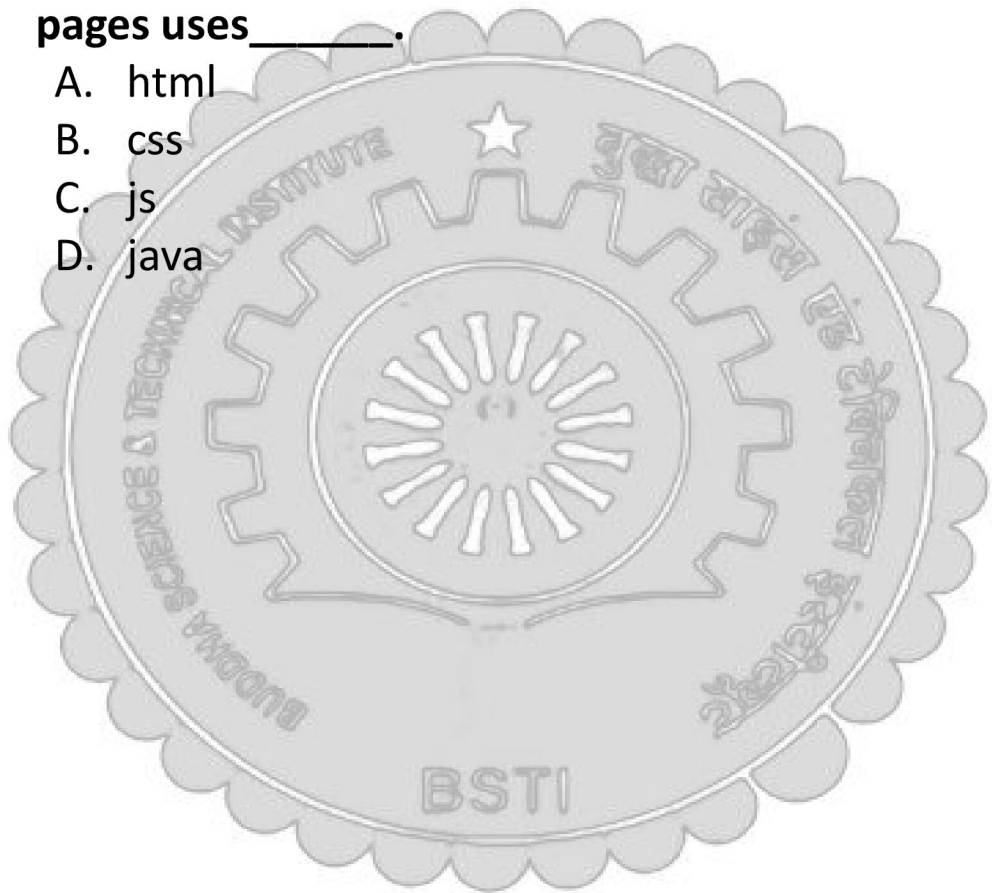

ANSWER						
1.	B		11.	C	21.	A
2.	A		12.	A	22.	A
3.	B		13.	D	23.	D
4.	B		14.	A	24.	D
5.	D		15.	A	25.	C
6.	A		16.	A		
7.	A		17.	B		
8.	C		18.	A		
9.	D		19.	D		
10.	A		20.	C		